

Analysis, Design and Documentation of a Form-Found Civic Sculpture for Lower Manhattan

Journal:	<i>IABSE Nara 2015</i>
Manuscript ID:	Nara-0107-2015.R2
Theme:	Elegant structures
Date Submitted by the Author:	n/a
Complete List of Authors:	Kostura, Zak; Arup, Structural
Material and Equipment:	Steel, New Materials
Type of Structure:	Lightweight Structures, Tension and Membrane Structures
Other Aspects:	Morphology and Formfinding, Structural Shapes and Forms, Innovative Structural Systems

Analysis, Design and Documentation of a Form-Found Civic Sculpture for Lower Manhattan

Zachary KOSTURA
Associate | Structural Engineer
Arup
New York, NY, USA
Zak.Kostura@arup.com



Zak is a Structural Engineer in the New York office with particular expertise in high performance structures. He provides senior structural design services on international tall building projects. Zak is also an adjunct professor of architecture in the Graduate School of Architecture, Planning and Preservation at Columbia University, where he provides a focus on structurally expressive architecture.

Summary

This paper presents an overview of the artistic and functional objectives of an 8-storey cable net sculpture for a new transit center in Lower Manhattan, and describes in detail the design approach of the project team, including software integration, nonlinear analysis, geometric modeling, documentation and construction administration. It outlines a hybrid documentation approach involving elements of both prescriptive and performance-based design for a system with strong aesthetic objectives and a collaborative approach to construction administration to manage risk amongst the various stakeholders

Keywords: Cable Net, Nonlinear Analysis, Performance Based Design, Public Sculpture, Tension, Form-Finding, Elegant Structures, Aesthetic Design, New Application of Materials to Structure, Innovations of Analysis, Design and Construction

1. Introduction

Eleven lines of the New York City subway system converge at or near the corner of Fulton Street and Broadway, one block east of the World Trade Center site and two blocks south of City Hall Park. Despite their dense tangle, these lines have evaded efficient connection for nearly a century: a legacy of disparate planning and construction practices common to the era of competitive, privatized transit operation. The eleven lines around Fulton Street, which were unified under a state agency in 1968, serve as a hub for more than 300,000 transit riders each day.



Fig. 1: Sky Reflector-Net.

In the aftermath of September 11, 2001, the Metropolitan Transportation Authority enacted plans to redevelop this hub into an efficient transfer point between nearby subway lines. They began a project to replace the labyrinthian corridors retroactively constructed to link existing lines with an efficient system of pedestrian mezzanines, concourses and underpasses to link platforms of the eleven transit lines. At the corner of Broadway and Fulton Street, the MTA planned a spacious multi-story pavilion structure to crown the new underground pedestrian network and serve as an iconic gateway to Lower Manhattan.

Arup has served as the prime consultant for the project, called Fulton Center, and has offered a wide range of multidisciplinary design services as well as overall planning and project management. Architectural design services for the transit center superstructure have been provided by Grimshaw, whose building concept included a three-storey glazed pavilion set around a centrally located, 8-storey dome structure. Topped with an inclined, circular skylight measuring 50 feet in diameter

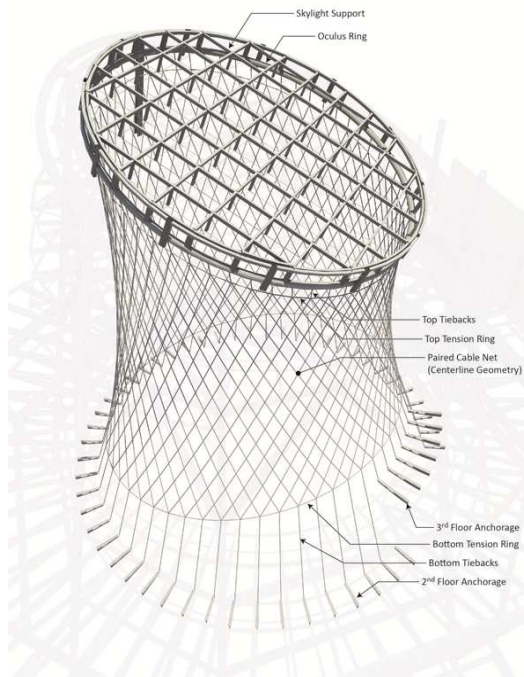


Fig. 2: Cable net components and boundary support.

The cable net extends the full height of the central public space. It is suspended from 56 connection points around the compression ring of the oculus and anchored to as many cantilevered beams at levels 2 and 3. The form of the cable net is that of a skewed hyperboloid. Unlike a regular hyperboloid, this form is not a single-ruled surface. Moreover, the skewed form has only one axis of symmetry. As a consequence, the shape of each four-sided infill panel is unique. Its shape is set out by the lengths and intersecting angles of cable segments adjacent to each side.

The reflective infill panels are comprised of 1/8" aluminum substrate with a high performance coating applied to the interior faces. They are perforated with a regular circular pattern to control the quantity of light reflected, reduce loading on the cable net, and permit the passage of interior air currents. The panels are linked to the cable net at each corner by cruciform connectors affixed to the nodes of the net.

The strategy for securing each panel follows with conventional cladding practice. The panel is suspended from its top corner by a pin fed through a standard hole in the corresponding connector. The angle and position of the panel in space is established at the bottom corner, where a pin is fed

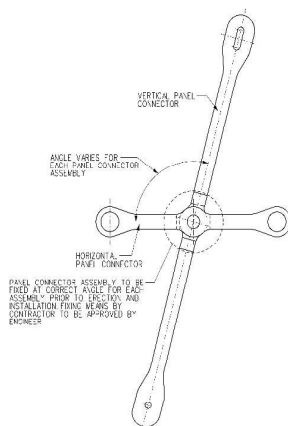


Fig. 3: Typical node assembly.



referred to as the oculus, this large central space marks the focal point of the extensive project and serves to collect and redirect natural sunlight through the building to the exhumed sublevels below.

The central space beneath the dome and oculus offer a unique opportunity for a large-scale artistic installation, to further add character to the space and extend the architectural objective of repurposing incident sunlight to illuminate subterranean spaces. The MTA held a public art competition to find a concept for an installation.

Submitted by artist James Carpenter, the winning entry called for a metal lining offset from the interior of the dome that would provide diffuse reflection of incident sunlight into the spaces below. Through a collaborative process with the design team, the concept was refined into a steel cable net structure supporting nearly 1,000 coated aluminum infill panels using flexible, universal node connection assemblies. Following completion of the installation it was titled *Sky Reflector-Net* by the owner and design team.

2. Design

The cable net extends the full height of the central public space. It is suspended from 56 connection points around the compression ring of the oculus and anchored to as many cantilevered beams at levels 2 and 3. The form of the cable net is that of a skewed hyperboloid. Unlike a regular hyperboloid, this form is not a single-ruled surface. Moreover, the skewed form has only one axis of symmetry. As a consequence, the shape of each four-sided infill panel is unique. Its shape is set out by the lengths and intersecting angles of cable segments adjacent to each side.

The reflective infill panels are comprised of 1/8" aluminum substrate with a high performance coating applied to the interior faces. They are perforated with a regular circular pattern to control the quantity of light reflected, reduce loading on the cable net, and permit the passage of interior air currents. The panels are linked to the cable net at each corner by cruciform connectors affixed to the nodes of the net.

The strategy for securing each panel follows with conventional cladding practice. The panel is suspended from its top corner by a pin fed through a standard hole in the corresponding connector. The angle and position of the panel in space is established at the bottom corner, where a pin is fed through a vertically slotted hole that allows for correct positioning with a minimum amount of restraint. Holes in connector arms at the left and right corners are oversized to allow for independent movement of the net due to changes in temperature across the 8-storey net or air pressure caused by large air intake grills located at its midpoint.

The net is comprised of 112 stainless steel cable pairs. The cables, which are 1/4" in diameter, are mechanically swaged at each node. Swages are through-bolted with cruciform connectors arranged in between the opposing cable pairs. Stainless steel rods are used for top and bottom ties as well as ring elements.

2.1 Form-finding

An initial visual assessment of the skewed hyperbolic form indicated that a form-found tensile system could be developed to fit the desired geometry. This was enabled through the use of swages at the cable net nodes that tightly grip the cables, allowing each cable segment to carry a unique tensile force and dramatically broadening the range of geometric forms achievable using a purely tensile system.

As the desired final form was known, the “form-finding” process entailed ascertaining the relative magnitude of tensile force required in each cable segment to achieve that form. A computational model of the desired cable net geometry (including the position of all nodes) was developed with support from the architect. It was referred to as a *soft model* because the stiffness properties of the cable elements were reduced to nearly zero. When form-finding is conducted on the soft model, the equilibrium position of the found form is influenced only by the final strains in each cable segment.

The soft model was first run with a uniform 900-pound tensile force in each cable pair. The resulting found form varied significantly from the initial, desired geometry due to the generalized tension force. Where the force entered was larger than the true tension force, the cable segment shortened. Where the force was smaller, the cable segment lengthened.

These geometric shifts from the initial geometry, while undesirable in principle, result in a redistribution of the generalized initial tension force. The shortening of segments that were overstressed, for example, leads directly to a reduction in the force in the element following form finding and tension force redistribution. Put simply, the tension force redistribution inherent in the form-finding process is self-correcting.

These redistributed forces were again applied to the desired architectural geometry. The resulting node displacements were smaller than those observed in the first iteration, and the redistribution of tension force resulting from this second form-finding routine further approached the correct tension force values for each cable segment.

A custom subroutine was written and embedded into Microsoft Excel to automatically run subsequent iterations, each time applying the redistributed loads to the original geometry and performing a form-finding routine. The routine terminated once convergence indicators were met, following the 113th iteration. The resulting tension force distribution pattern exhibited maximum average values of 906 pounds at the top and bottom rows and minimum average values of 886 pounds at mid height.

These tension forces were converted into element strains, which were subsequently applied to a new analytical model embodying the desired architectural geometry as well as the actual stiffness properties of the cable net elements. A non-linear static analysis of this model demonstrated negligible movements in the nodes of the net, confirming the validity of the distribution of strains. These strains were then used to determine the unstressed length of each cable segment – data later used for the fabrication of net cables and assembly of swages prior to installation.

The validated architectural geometry was tabulated and presented as a set of Cartesian node coordinates. In turn, the tabulated coordinates of the cable net nodes became the set-out geometry for the 952 infill panels. Successful execution of the design of the installation thus necessitated correct distribution of tensile force throughout the net, resulting in the positioning of each node in space so that the shape of each prefabricated infill panel would match that of the space within the net it was intended to occupy.

2.2 Understanding movement

The 8-storey space experiences significant thermal gradients, as warm air collects near the oculus and cool, conditioned air is diffused within the occupied space below. The ventilation strategy for the building relies on the development of air currents that must pass through the panels of the net, resulting in pressure drops across the perforated surface created by infill panels and generating loads that will influence the shape of the net.

Collaboration with the architect and artist led to the adoption of a two-way cable net system and corresponding diamond-shaped panels. In contrast to a conventional three-way, triangulated system, the adopted configuration is substantially more responsive to fluctuations in applied loads. To

realize such a system, the design team found it necessary to study a wide range of conceivable applied loading patterns and assess corresponding changes in the form of the net in order to ensure its resiliency. Were any of these movements to result in the transfer of tensile forces to the infill panels, such forces could quickly overwhelm the delicate aluminum elements. The cruciform connector arms thus hold each panel in place with minimal restraint in order to allow for unrestrained movement of adjacent cable net nodes.

These degrees of freedom are provided by the slotted and oversized holes in the connector arms on the left, right and bottom corners of each panel. The dimensions of these non-standard holes must be coordinated with the maximum conceivable movements in order to provide sufficient freedom of movement and avoid the transfer of force into the aluminum panels.

Each environmental characteristic was studied and various realistic scenarios were developed to cover the range of corresponding loading conditions. To determine the magnitude of air pressures generated by interior air currents, a computational fluid dynamic (CFD) model was developed in ANSYS. The program identified the pressure drop across panels given the known volumetric flow of intakes and diffusers throughout the building and the degree of permeability in each area of the cable net.

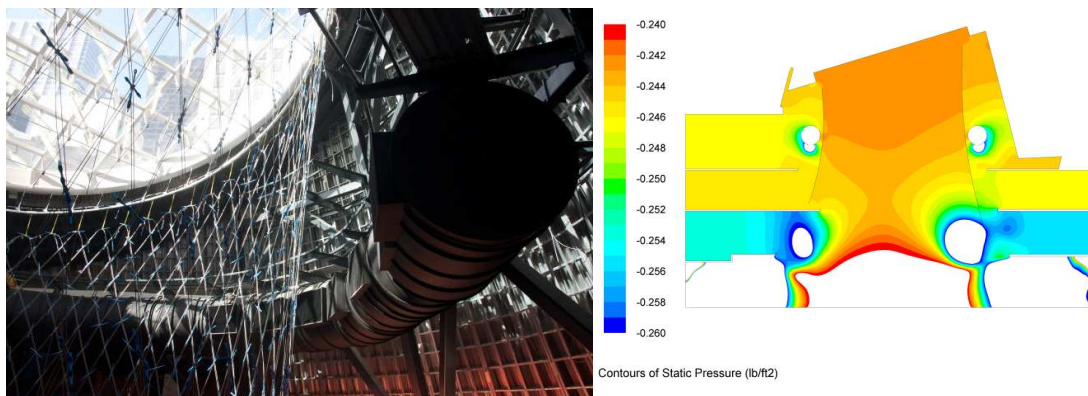


Fig. 4: Intake ducts behind the net as seen during installation (left), and a computational fluid dynamic (CFD) model that was generated to determine air pressure incident on model (right).

The scenarios for each environmental characteristic were then superimposed to generate 815 unique load combinations, each with a presumed unique cable net shape. A static non-linear analysis was conducted in Oasys GSA for each of the 815 load combinations. A custom subroutine was written to interrogate the position of each node under each load case and determine the largest changes to the support conditions of each panel. An increase in the distance between left and right corner supports was referred to as a “panel width change”; the peak value implied the required dimensions of the oversized holes at these support points. Correspondingly, an increase in the distance between top and bottom corner supports was referred to as a “panel height change”, which provided information on the necessary dimensions of the vertically slotted hole at the bottom connection point.

Analysis revealed that the largest resolved movement of any node under any perceivable load combination is approximately 2.13”. Broken into its components however, this maximum movement results in a change of only 0.23” in panel width and 0.08” in panel height. The dimensions of oversized and slotted holes were correspondingly set to accommodate these movements in addition to acceptable construction tolerances of 0.25” in either direction.

2.3 Modeling a universal connector

A universal cruciform connector was developed to provide adequate panel support in the variety of configurations that result from the skewed hyper shape. Each connector is comprised of a horizontal and vertical armature, linked by a bolt at their midpoints and set between swaged cable pairs. All elements are free to rotate about the bolt axis.

This rotational freedom is needed to allow the connector armatures to conform to the various

required configurations. The armatures, which are nominally 1/4” in thickness, taper to 1/8” at their midpoints to minimize the effective thickness of the armature assembly, and the corresponding eccentricity between opposing cable pairs.

The process of designing the universal connector armature required the selection of geometry that incorporated the space-saving taper while facilitating the free rotation of armature elements to accommodate the various panel configurations.

A parametric model was developed in Digital Project to assess the performance of various connector armature designs. Each connector component, including the armatures, bolt and swages, were individually modeled as discrete parts and subsequently assembled into a single component. That assembly was instantiated into a global model containing the 896 cruciform connector nodes.

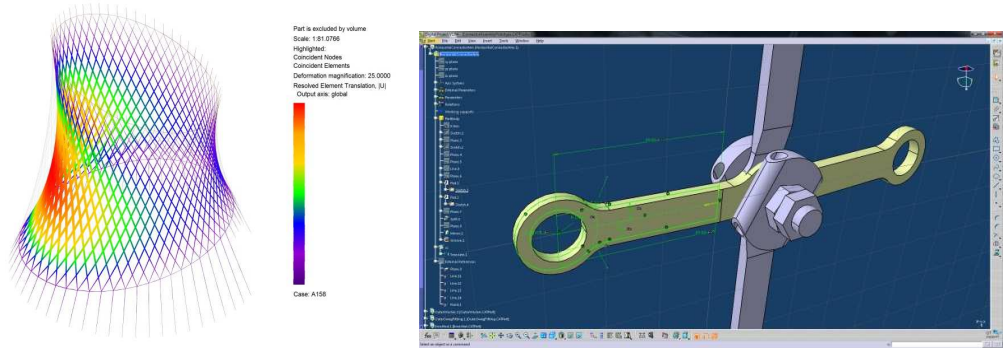


Fig. 5: Cable net deformations caused by environmental loading (left), and parametric definition of the horizontal armature (right).

Set-out instruction intrinsic to each connector instance facilitated rapid configuration given the position of adjacent nodes in all directions. A separate clash detection program was then used on the solids to confirm the rotational adequacy of the universal part design.

Limitations to computing power available at the time led to instantiation routines that took days to complete. The design team observed that the instantiation of solid components to be by far the most time consuming; points and lines that established the location and orientation of the components, on the other hand, were much faster to instantiate.

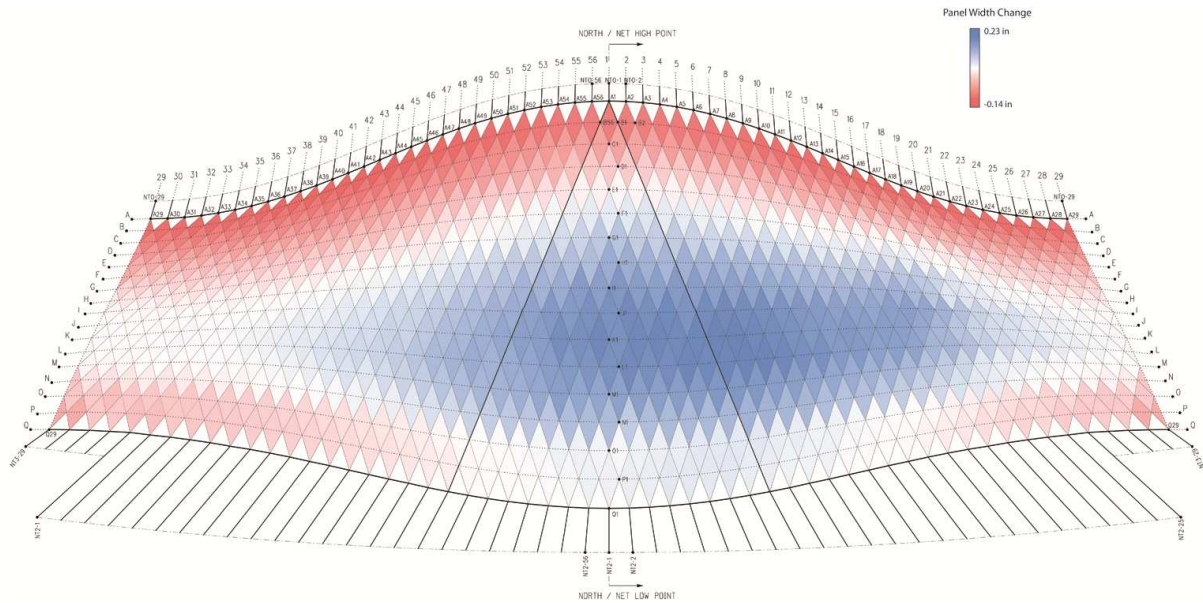


Fig. 6: Assessment of changes to panel shape due to movements. One of 815 load cases shown.

In order to accelerate the process of studying each armature design, solid components were removed and only set-out lines were instantiated. A custom script was written to interrogate the relative angles between each armature pair, and the most severe angles were then modeled using the solid components to test their suitability. This modified approach to parametric modeling proved exceptionally fast, and instantiation of armatures on all 896 points was completed in a matter of seconds.

The geometry of the armatures for the universal connector was optimized for visual and performance criteria through the parametric model, and the final design was extracted from the individual part models and presented as simple 2-dimensional sections and elevations in contract drawings.

3. Documentation

Documentation of complex systems such as cable nets often conform to the tenets of performance-based design, wherein the design of a system is documented in the form of performance objectives that the contractor is required to meet. The distribution of risk across the project team in such a circumstance favors the designer, as the contractor is burdened with the need to perform extensive analysis to determine dimensional and characteristic values not explicitly called out in the contract documents. However the performance-based approach has its downsides as well.

In performance-based design, the designer often observes a loss of control over the finished product, as the contractor gains latitude to creatively interpret documented objectives as well as the means of achieving those objectives. Additionally, as a substantial amount of analysis is often required of the designer in order to verify that the documented objectives can in fact be met, this approach leads to added duplication in analysis and design tasks. And explicit design of the system, which is performed by the contractor in such circumstances, is put on the critical path of construction, adding to overall project risk.

In documentation of *Sky Reflector-Net*, the design team employed a hybrid approach, largely embracing prescriptive design while sparingly integrating performance criteria to ensure the selection of a specialty subcontractor knowledgeable and experienced in the construction of such a system. In addition, the designer was motivated to bring in performance requirements in order to facilitate a productive dialog with the contractor that would allow the designer to more effectively monitor and observe the contractor's coordination, shop drawing preparation, fabrication and assembly of the cable net.

The extensive form-finding analysis conducted by the design team yielded comprehensive data on the characteristic node coordinates and element strains in the cable net system. Because this data was subsequently available to the design team, who maintained a high level of confidence in the validity of that data, a prescriptive approach to documentation became the team's baseline. Nodes were given unique identifiers, tabulated and presented in the contract drawings with explicit three-dimensional coordinates.

For tensioning, the drawings conveyed to the contractor the precise tension force to be applied to each boundary element. Average tension forces were provided for each row of cable pair segments, as the standard deviation in tension forces in any given row of the net was considered low relative to the magnitude of tension forces and the corresponding margin of error intrinsic to the tensioning process.

The provision of this prescribed set of tensioning data helped ensure that the system provided by the contractor embodies not only an acceptable distribution of tensile forces to achieve the desired form, but also an average level of tensile force necessary to ensure that movements under environmental loads are kept within acceptable limits.

Were the design team to produce a performance-based design, the contractor would require detailed information on loading assumptions in lieu of prescribed tension forces. The contractor would be compelled to perform a far more sophisticated analysis of the cable net system to identify tension forces commensurate with permissible node movements – analysis that had already been conducted

by the design team to arrive at a component design that balanced aesthetic and performance requirements. Such duplication of analysis would be costly and add additional tasks to an already complex construction schedule.

Provisions on drawings containing the tabulated node coordinates put the onus on the contractor to ensure that the coordinates of each node in the installed cable net matched the tabulated coordinates in the design drawings within specified construction tolerances. The design team concluded that this requirement would incentivize the contractor to perform a controlled amount of analysis to ensure that all cable and rod segments were fabricated to lengths appropriate for the specified boundary tension forces outlined in the drawings. This analysis was carried out by the contractor, yielding specific tension forces in each element that were used by fabricators to prepare shop drawings illustrating cable marking lengths. These were received by the design team as submittals, allowing the design engineers to check the resultant shape using non-linear static analysis.

This analysis served to reassure the design team that fabrication drawings had been developed from a suitable analytical model, owned by the contractor, which had produced results matching those produced by the designer's model. However the prescriptive dimensional and force data produced by the design team eliminated the need for the contractor to undertake complex form-finding. Rather the tabulated node coordinates were used to generate a non-linear static analysis model that could be analyzed with the documented tension forces to confirm that any node displacements would remain within the governing performance-based requirements.

4. Construction

Construction of the transit center superstructure and fit-out of the area bounded by its enclosure and foundation beneath were packaged into a single construction contract that was awarded to a joint venture comprised of Plaza Construction and Schiavone Construction Co. (PSJV) in August of 2010. The complex and unconventional nature of the cable net compelled the general contractor to bring on several specialist subcontractors to fabricate and install the tensile structure. Coordination of the cable net was managed by Enclos, the subcontractor also selected to provide façade components for the pavilion enclosure and the oculus. Cables and custom connection elements, such as the cruciform armatures, were provided by TriPyramid Structures, Inc. The anodized aluminum infill panels were provided by Durlum out of Schopfheim, Germany. Along with the steel fabrication and erection subcontractor STS Steel, these members of the construction team exhibited skill and expertise that added to the value of the design through open collaboration. Performance-based provisions in the contract documents, which were intended to incite discourse among members of the design and construction teams, brought about fruitful if occasionally intense discussion over elements of the design and strategies for its execution.

4.1 Fabrication, assembly and installation

The net was fabricated and assembled by TriPyramid in a small rural town in northern Massachusetts. Each connector assembly was pieced together and wrapped for protection during transport. Once assembled, the net was lifted by crane in a field outside the assembly facility in order to simulate its actual installation on site. The net was then lowered and rolled immediately for transport to site by truck.

Once on site, the net was lifted into place with the use of a temporary aluminum lifting ring raised by a set of hydraulic jacks mounted around the perimeter of the atrium at the upper levels of the transit center, and lifting cables that doubled back over the oculus above. Once all boundary connections were made, the installer, Enclos, tensioned the net through a procedure that involved the imposition of known and unique displacements on the lower tension rods, inducing target boundary forces obtained through design team analysis and provided on contract drawings.

Panels were then installed through the use of two man-lifts and a swing stage platform suspended from the oculus. Panel installation was completed in approximately three weeks.

4.2 Survey

The Arup Design Team contracted Naik Consulting Group, P.C. to carry out a three-dimensional LIDAR survey of the cable net at critical installation milestones. The survey, which uses remote

sensing technology to measure distances, generated a cloud of several hundred million points representing the as-built surface geometry of the interior atrium space. The point cloud was used to identify the position of cable net nodes following installation and tensioning, both before and after panels were installed. The resulting information was used by the design team to assess the conformance of the constructed system to contract performance requirements, and identify regions of the completed net for in-depth, up-close review.

The survey was commissioned by the client during construction administration as an effective risk management tool. Although no issues prompted extensive use of the LIDAR survey data for corrective action, the presence of this information could be used to compare the distribution of tension forces throughout the as-built structure to those established through design stage analysis, thereby providing information on system elements requiring adjustments to their tensioned length.

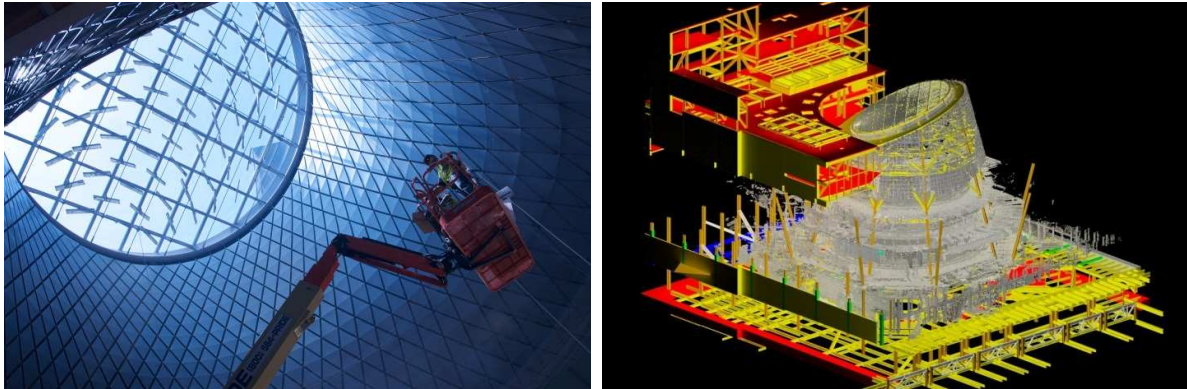


Fig. 5: Review of the net structure shortly after completion (left), and LIDAR survey data (shown in grey) overlaid on the project BIM model.

4.3 Conclusion

The cable net installation at the new Fulton Center combines two generally disparate structural systems: a form-found cable system prone to movement under varying loads, and a system of rigid, delicate aluminum panels sensitive to strains caused by movement at their support points. In order to achieve a harmony between these systems, detailed nonlinear analysis was performed to fully understand the magnitude of deflections under all conceivable load cases. A linear algebraic model of the net facilitated rapid interrogation of corresponding deflection components within the plane of the panel surface.

These movements were subsequently addressed through the design of a universal, flexible connection assembly that isolates the panels from the effects of the net's dynamic behavior through strategically-placed slotted and oversized holes. The flexibility of the universal assembly was tested through the use of parametric modeling, which simulated the geometric configuration of the assembly in each of the 896 intermediate node positions.

The detailed analysis provided for the use of prescriptive design documentation, which provided the contractor with clear geometric and force data. The resulting fabrication, assembly and installation occurred without major incident. Substantial completion of the cable net was achieved in June 2013 at an estimated cost of \$3.8M. The Fulton Center complex is scheduled to open to the public in February 2014.

5. Acknowledgments

The authors would like to thank Ricardo Pittella, P.E. (Associate Principal), John Batchelor (Director), and Craig Covil and Markus Schulte (Principals) at Arup for their supervision and guidance during the entire project. We would also like to thank James Carpenter, Richard Kress, Cameron Wu, and Torsten Schlauersbach at JCDA and Grimshaw Architects, PC, New York for their collaboration on the project. Special thanks are extended to the MTA, in particular Uday Durg, Raj Desai and Virginia Borkoski. All images courtesy of MTACC/NYCT and Arup. All images © MTACC/NYCT. All photographs © Arup/Zak Kostura.

Analysis, Design and Documentation of a Form-Found Civic Sculpture for Lower Manhattan

Zachary KOSTURA
Associate | Structural Engineer
Arup
New York, NY, USA
Zak.Kostura@arup.com



Zak is a Structural Engineer in the New York office with particular expertise in high performance structures. He provides senior structural design services on international tall building projects. Zak is also an adjunct professor of architecture in the Graduate School of Architecture, Planning and Preservation at Columbia University, where he provides a focus on structurally expressive architecture.

Summary

This paper presents an overview of the artistic and functional objectives of an 8-storey cable net sculpture for a new transit center in Lower Manhattan, and describes in detail the design approach of the project team, including software integration, nonlinear analysis, geometric modeling, documentation and construction administration. It outlines a hybrid documentation approach involving elements of both prescriptive and performance-based design for a system with strong aesthetic objectives and a collaborative approach to construction administration to manage risk amongst the various stakeholders

Keywords: Cable Net, Nonlinear Analysis, Performance Based Design, Public Sculpture, Tension, Form-Finding, Elegant Structures, Aesthetic Design, New Application of Materials to Structure, Innovations of Analysis, Design and Construction



Fig. 1: Sky Reflector-Net.

Sky Reflector-Net is an artistic and architectural focal point of Fulton Center, a new transit hub in Lower Manhattan, New York. The tensile structure incorporates delicate but rigid reflective cladding panels within the 952 voids of the stainless steel net. The intricate components and ethereal feel of the structure were achieved through a highly integrated, multidisciplinary and thoroughly digital design approach, where the true dynamic nature of the found form was simulated, studied, and directly linked to the parameters driving the connection geometry.

Arup developed a computational model of the desired cable net geometry, and developed an automated process for iteratively developing a

precise pattern of cable tension forces to realize the desired form. This process utilized nonlinear form-finding software coupled with customized subroutines controlled through Microsoft Excel. The process adopted for developing the desired geometry demonstrated timely convergence and the found form was validated through static structural analysis.

The cable net installation at the new Fulton Center combines two generally disparate structural systems: a form-found cable system prone to movement under varying loads, and a system of rigid, delicate aluminum panels sensitive to strains caused by movement at their support points. In order to achieve a harmony between these systems, detailed nonlinear analysis was performed to fully understand the magnitude of deflections under all conceivable load cases. A linear algebraic model of the net facilitated rapid interrogation of corresponding deflection components within the plane of the panel surface.

These movements were subsequently addressed through the design of a universal, flexible connection assembly that isolates the panels from the effects of the net's dynamic behavior through strategically-placed slotted and oversized holes. The flexibility of the universal assembly was tested through the use of parametric modeling, which simulated the geometric configuration of the assembly in each of the 896 intermediate node positions.

The design team employed a hybrid approach to documentation, largely embracing prescriptive design but thoughtfully integrating performance criteria to ensure the selection of a specialty subcontractor knowledgeable and experienced in the construction of such a system. In addition, Arup was motivated to bring in performance requirements in order to facilitate a productive dialog with the contractor that would allow the designer to more effectively monitor and observe the contractor's coordination, shop drawing preparation, fabrication and assembly of the cable net. The resulting working environment promoted open dialog on potential construction issues and a balanced approach toward project risk management.

Comprised of more than 10,000 stainless steel components and nearly 1,000 aluminum panels, the sculpture was installed at a cost of about \$3.8M and opened to the public in 2014.

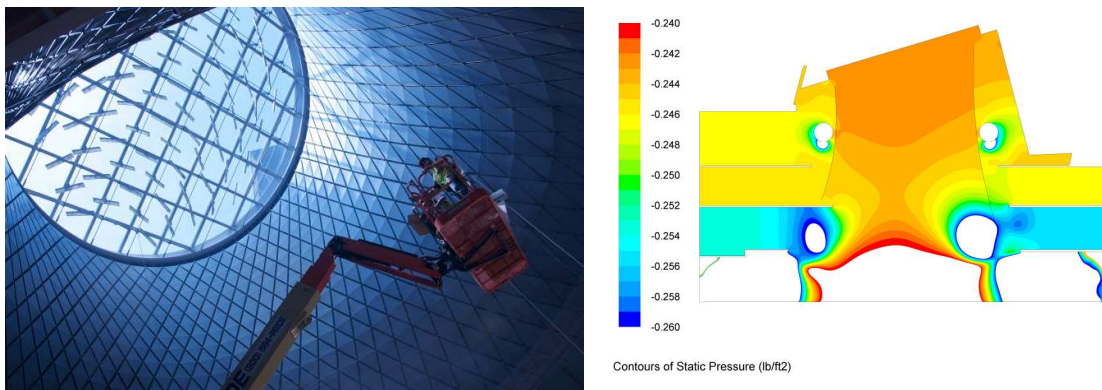


Fig. 1: (a) contractors performing final checks of the near-completed structure. (b) Computational fluid dynamic (CFD) model developed to assess air pressure forces on the tensile form.

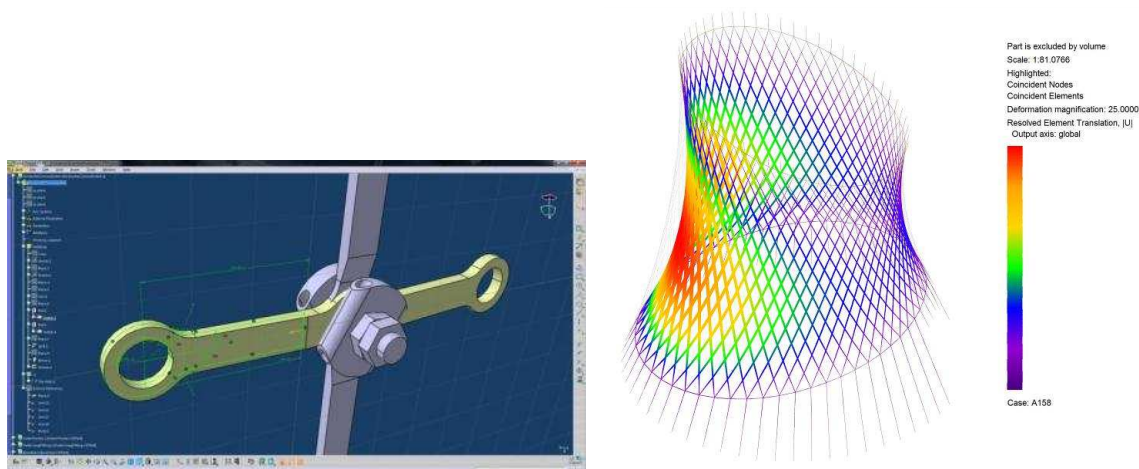


Fig. 2: (a) CATIA parametric model of universal cable net connector assembly. (b) Structural analysis of the cable net when subjected to one of 815 unique loading scenarios.